



**TECEprofil toilet module with Uni cistern, with integrated warm and cold water hygiene flushing function, installation height 1120 mm**

**Article number: 9300102**

**DU 1: 1 pc.**

**DU 2: 10 pc.**

**DU 3: 60 pc.**

**Description:**

Toilet module including "easy fit" flush plate assembly. For fixing to TECEprofil section tubes or for installation in metal or wooden stud walls and as a pre-wall or corner module; also suitable for single block assembly.

Uni cistern for operation from the front:

- Cistern with integrated hygienic flush
- Completely pre-installed flushing unit with hygienic flushing function
- Multi-way shut-off valves with function for flushing the pipework before commissioning
- Two cistern connections with outer thread R 1/2" at the top, for flushing hot and cold water pipes (2 x cold water possible), compatible with quick-action adapters
- Safety tank made of impact-resistant plastic, tested to EN 14055
- Cistern completely pre-assembled and sealed
- 10 litre tank volume; 6 litres preset standard flush volume; 4.5/7.5/9 litres flush volume adjustable at any time; 3 litres partial flush with dual-flush system; residual volume can be used for immediate cleaning flush.
- Insulated against condensation water
- Suitable for TECE flush plates and toilet flush handles
- Can be used as a single or dual-flush cistern
- "easy fit" flush plate installation
- Installation tunnel for service opening, can be shortened without tools
- Low-noise hydraulic filling valve, acoustic group 1 in accordance with DIN 4109
- Mains connection with transformer including connection cable
- Fill level sensor, protects against backflow in the cistern

Operation:

- Via Bluetooth interface via TECE app Smartflow
- Optional via BMS interface
- Infinitely variable setting of flush intervals and flush volume
- Setting of flush days and flush volume
- Logging of flush history

Module frame:

- Self-supporting, powder-coated
- Two M 12 retaining bolts and nuts
- Toilet drainage bend DN 90 with joint adapter DN 90/100 made of PP
- joint adapter also suitable for horizontal installation
- Toilet connection set DN 90
- Toilet connection box including rough-in protection, with junction box and cover for transformer


Setting of a raised ceramic attachment for 48 cm seat height, possible in accordance with DIN 18040 (DIN 18040-1: Construction of accessible buildings - Design principles - Part 1: Publicly accessible buildings).

---


**Sales data:**

Product name: TECEprofil toilet module with Uni cistern, with integrated warm and cold water hygiene flushing function, installation height 1120 mm  
Commodity group: 908  
Product group: 2009080010

## Dimensional drawings:

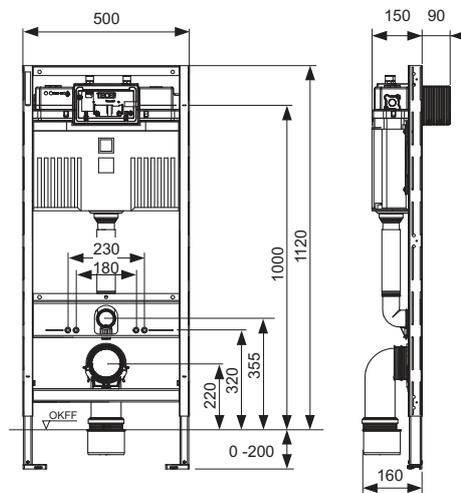

## Spare parts:

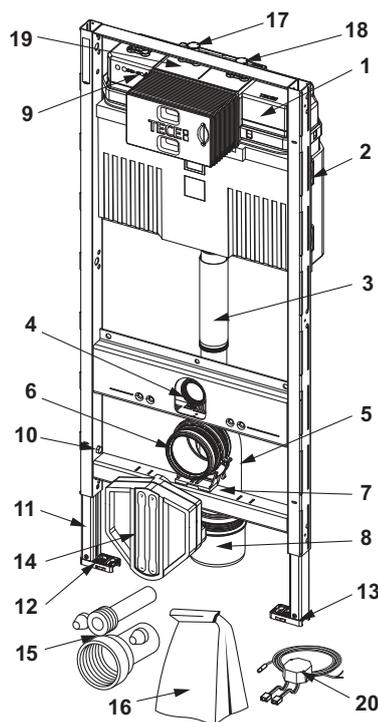

1	9820103	Uni cistern 1120 mm
2	9820040	Assembly kit for Uni cistern
3	9820011	Flush pipe with O-ring, length 269 mm, dry-wall construction
4	9820015	Flush pipe seal
5	9820134	Toilet drain bend DN 90 (PP)
6	9820139	Seal for toilet drain bend/adaptor
7	9820348	Toilet drain bend holder complete, mounting on cross-beam at bottom (from 04/2017)
8	9820136	Adapter DN 90/DN 100 (PP)
9	9820441	Hygiene flush unit
10	9820447	Foot brake with steel spring
11	9820335	C-section for module foot
12	9820332	Module foot with toggle left
13	9820333	Module foot with toggle right
14	9820568	WC connection box
15	9820057	Connection set DN 90 for toilet
16	9820043	By-pack for toilet module (mounting material, etc.)
17	9820442	Shut-off valve 3-way
18	9820443	Shut-off valve 4-way
19	9820573	Connecting pipe for hygiene flush unit
20	9810010	Transformer including connection cable